



Motorola C139 SIM Card Replacement

How to remove the SIM card from the Motorola C139

Written By: Christopher Stubbs




Step 1 — Battery



- Begin by flipping your phone over so that the back cover is facing up.
 - Apply force to the back cover and simultaneously slide the cover down.
- i** Note: Applying pressure on the ridges will make it easier to remove the cover.


Step 2

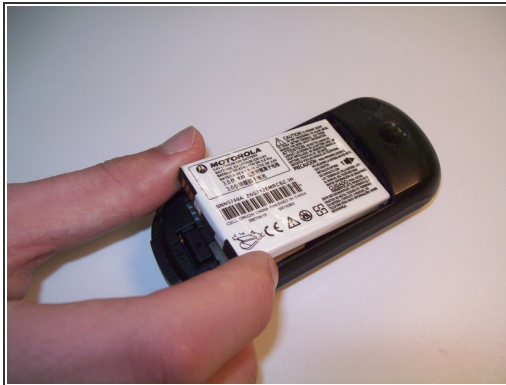

- Press the button labeled "PUSH" located at the bottom back of the phone. This will release the battery.
- Lift and remove the battery.

Step 3 — SIM Card



 Do not bend or scratch the SIM card. In addition, keep it away from static electricity, dust, and water.

- Gently slide the SIM card out and lift to remove it from the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 10:56:50 PM.